
Part No.	SL-T4233IRC050-L365-P	Page	1 of 9







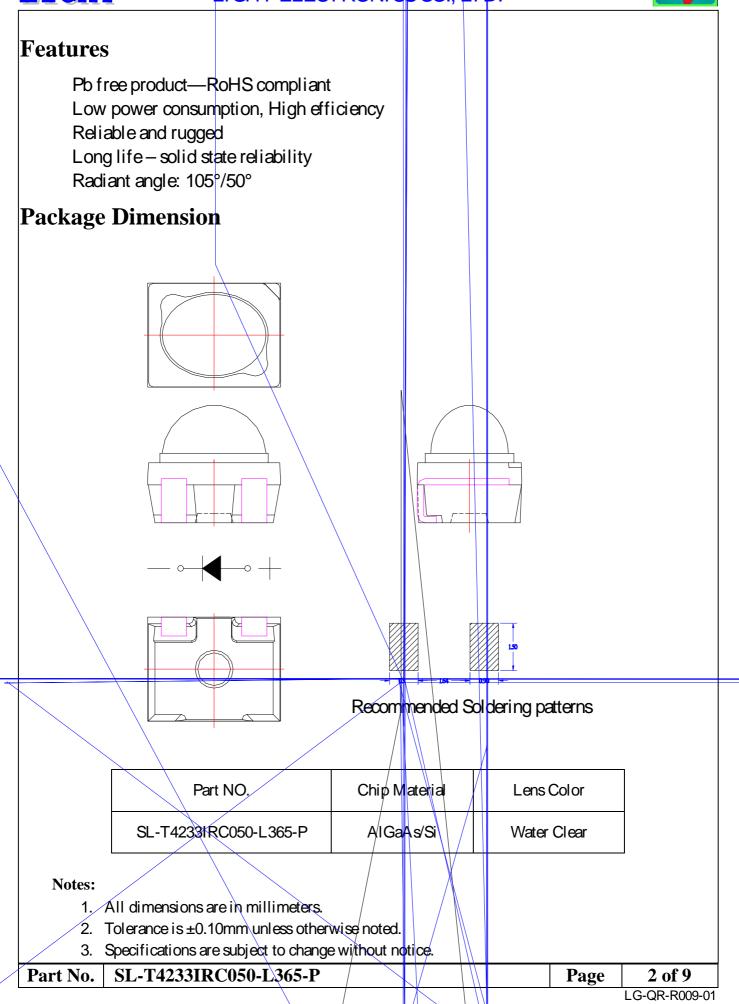

## LIGHT ELECTRONICS CO., LTD.







## Electrical Optical Characteristics at Ta=25

Parameter	Symbol	Min.	Тур.	Max.	Unit	Test Condition	
Podiont Intensity	le	8.8	12		mW/sr	I <sub>F</sub> =20mA (Note 1,3)	
Radiant Intensity	le	21	30		mW/sr	I <sub>F</sub> =50mA (Note 1,3)	
Viewing Angle(X)	0		105		Dog	(Niete 2)	
Viewing Angle(Y)	2 1/2		50		Deg.	(Note 2)	
Peak Wavelength	р		940		nm	I <sub>F</sub> =50mA	
Spectral Line Half-Width			50		nm	I <sub>F</sub> =50mA	
Forward Voltage	V <sub>F</sub>		1.35	1.60	V	I <sub>F</sub> =50mA	
Reverse Current	I <sub>R</sub>			10	μA	V <sub>R</sub> =5V	

### Note:

- 1. Point sources of the amount of radiation per unit time in a given direction within the unit solid Angle radiated energy.
- $2_{1/2}$  is the off-axis angle at which the Radiant Intensity is half the axial Radiant Intensity.
- 3. The le guarantee should be added ±15% tolerance.

Part No.	SL-T4233IRC050-L365-P	Page	4 of 9



## LIGHT ELECTRONICS CO., LTD.



#### adiant ntensity in ode m

in m sr	ax m sr
21	26
26	31
31	37
37	44
44	53

NOTE: The le guarantee should be added  $\pm 15\%$  tolerance.

Part No.	SL-T4233IRC050-L365-P	Page	6 of 9
		0	



# LIGHT ELECTRONICS CO., LTD.





## abel xplanation

-	

Part No.	SL-T4233IRC050-L365-P	Page	<b>8</b> of








est

eflow ondition or ead ree

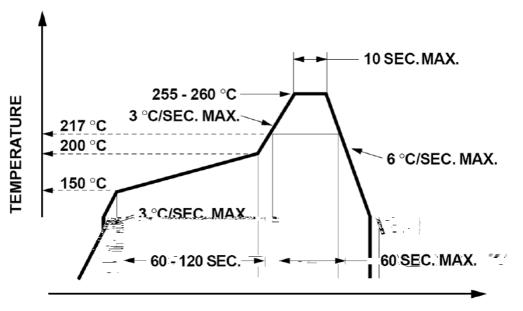



- 1. Reflow soldering should not be done more than two times.
- 2. When soldering, do not put stress on the LEDs during heating.

## oldering iron

- 1. When hand soldering, the temperature of the iron must less than 300  $^\circ\!{\rm C}$  for 3 seconds.
- 2. The hand solder should be done only once.

## epairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

Part No.	SL-T4233IRC050-L365-P	Page	9 of 9